




TITAN
MANUFACTURING




**MADE IN
USA**

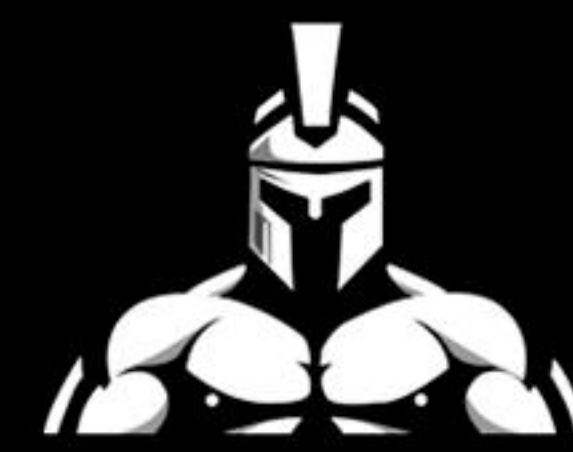

XOR SERIES **OUTSIDE RAIL HOIST**

**THE OUTSIDE RAIL ROLL-OFF HOIST IS THE MOST COMMONLY USED
HOIST IN THE INDUSTRY TODAY. TITAN OFFERS THIS HOIST WITH A 10"
MAINFRAME AND 4" SUBFRAME AVAILABLE IN 30K / 60K AND
75K POUND MODELS TO FIT ANY APPLICATION**

THE TITAN ADVANTAGE

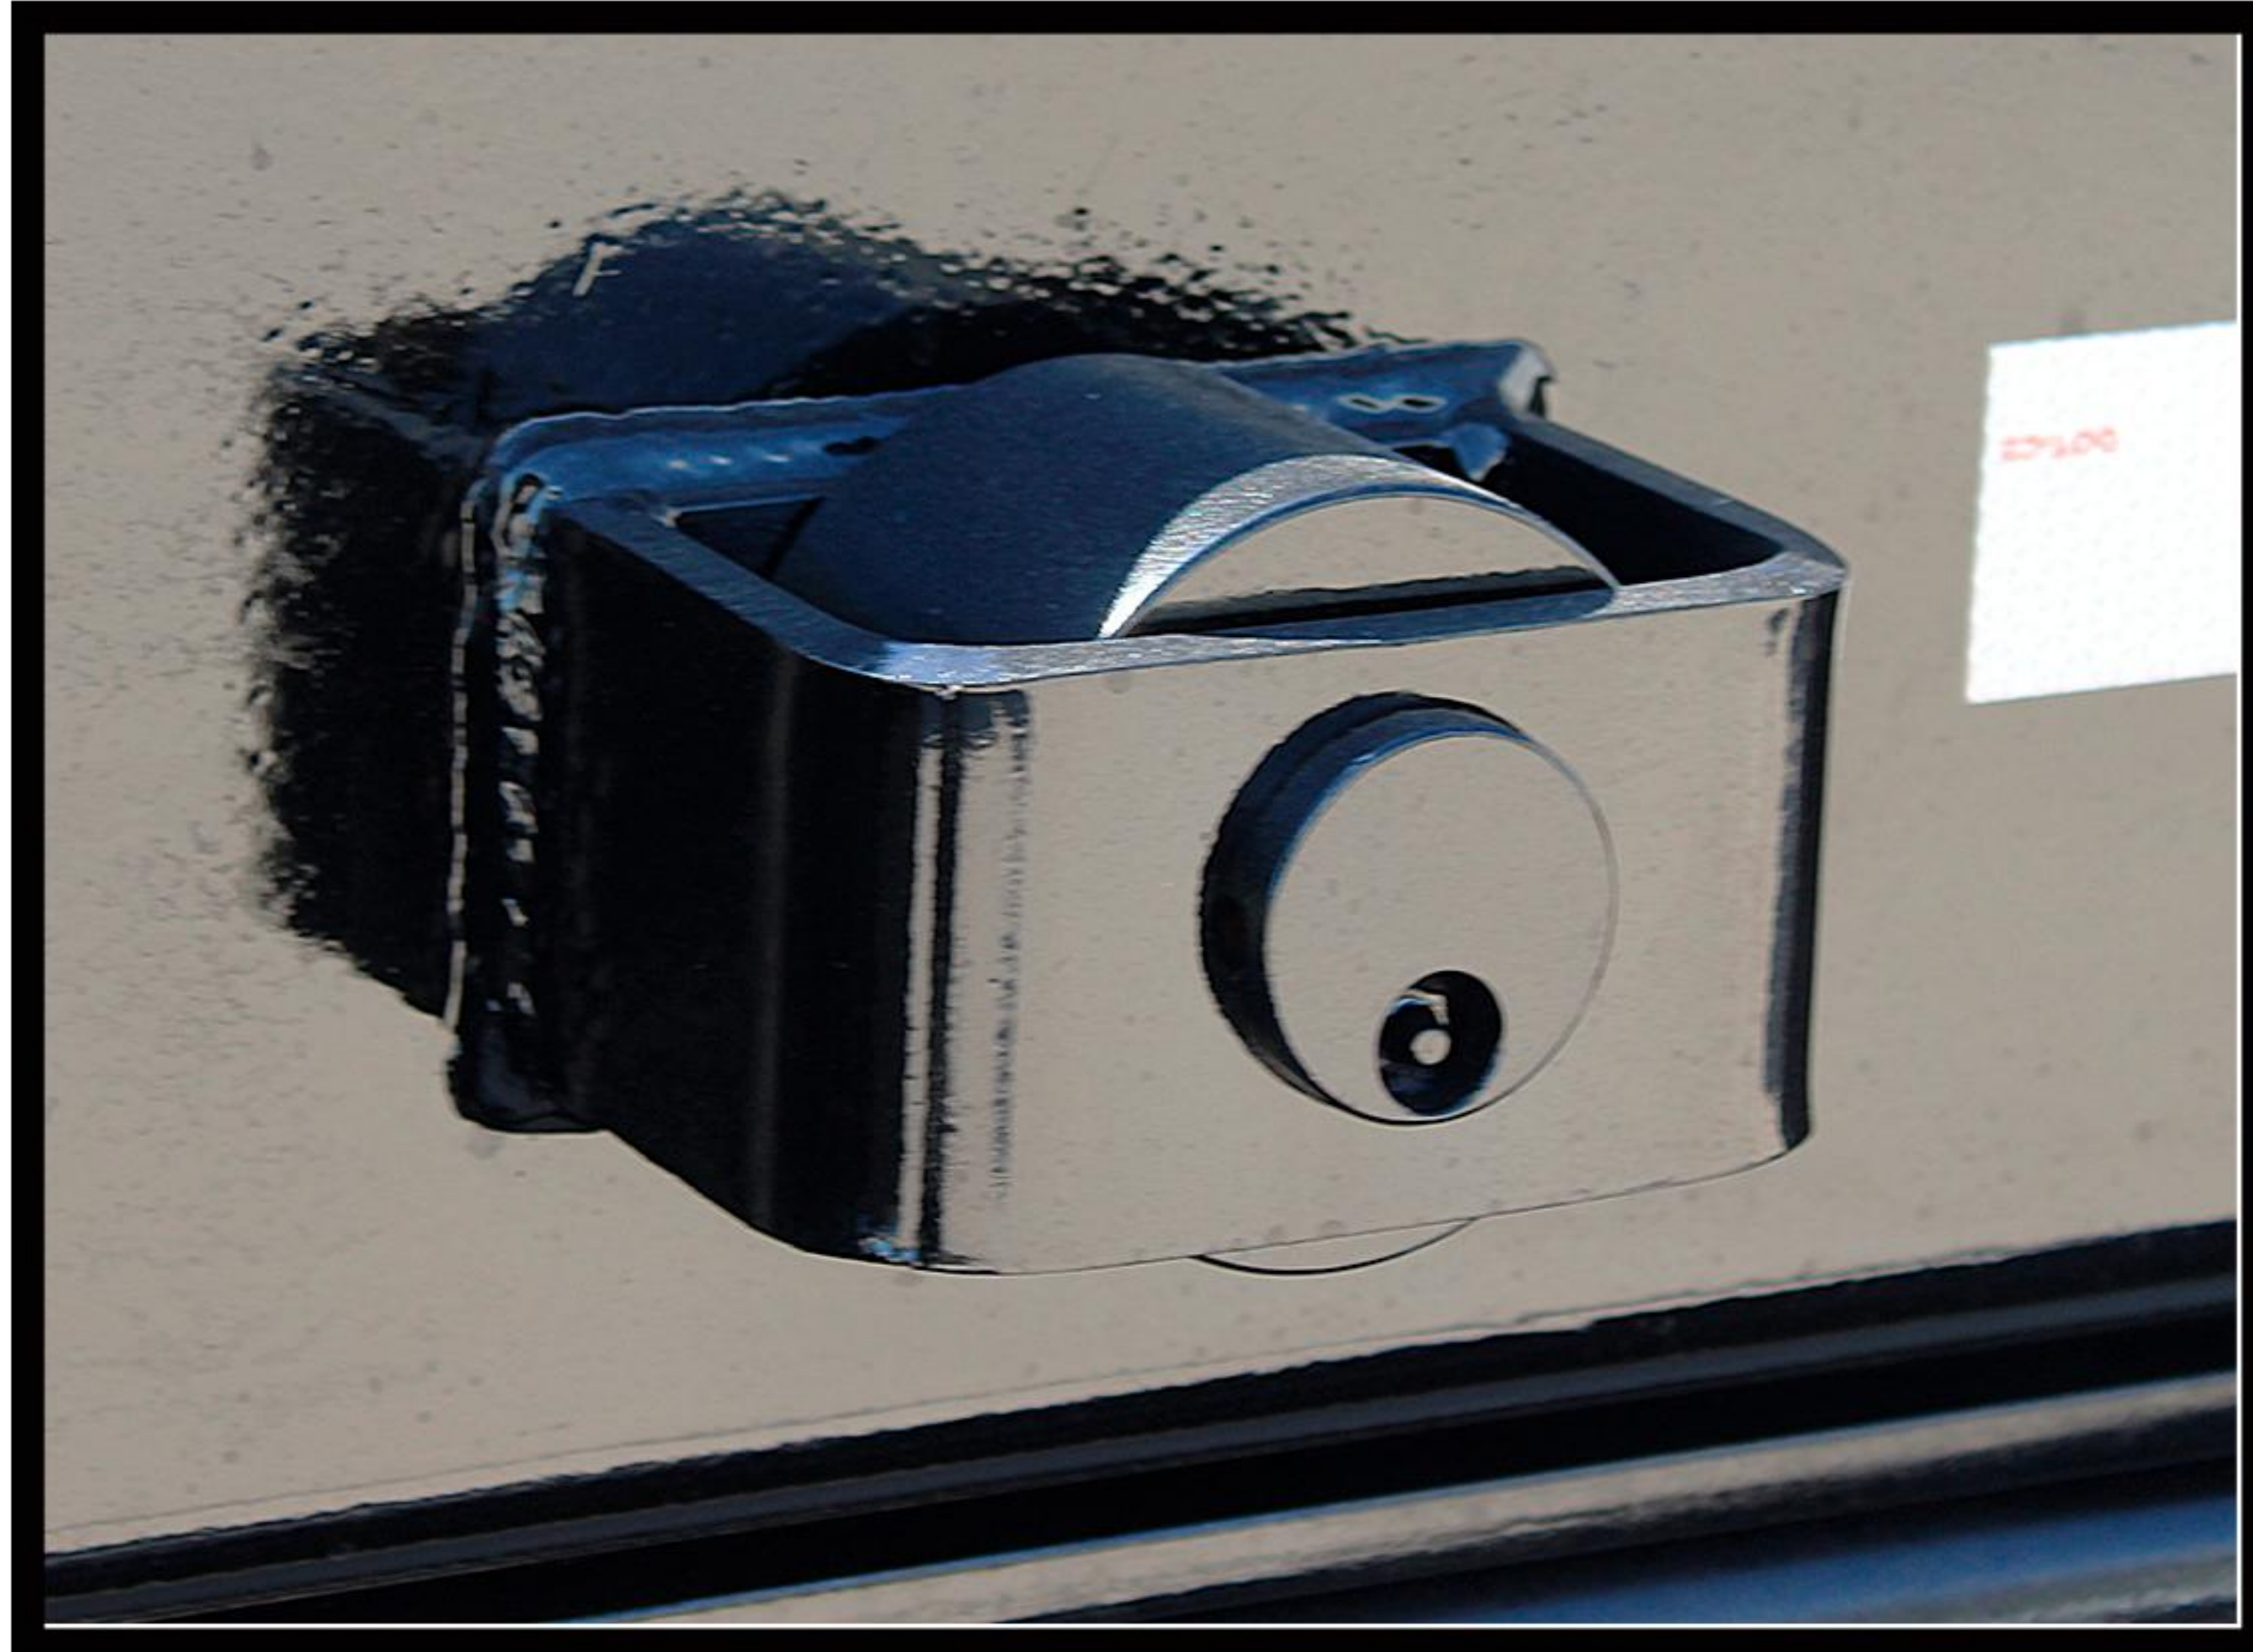


OUTBOARD SUPPORTED SIDE ROLLERS

GREASABLE ROLLER SHAFT WITH EXTRA REINFORCED STEEL SUPPORTS FOR MORE OVERALL LONGEVITY.



CONTAINER LONG SILL SUPPORT RAILS

RAILS AID IN LOADING MISALIGNED CONTAINERS AND GIVE EXTRA SUPPORT TO THE SILLS INCREASING THE LIFE OF YOUR HOIST.

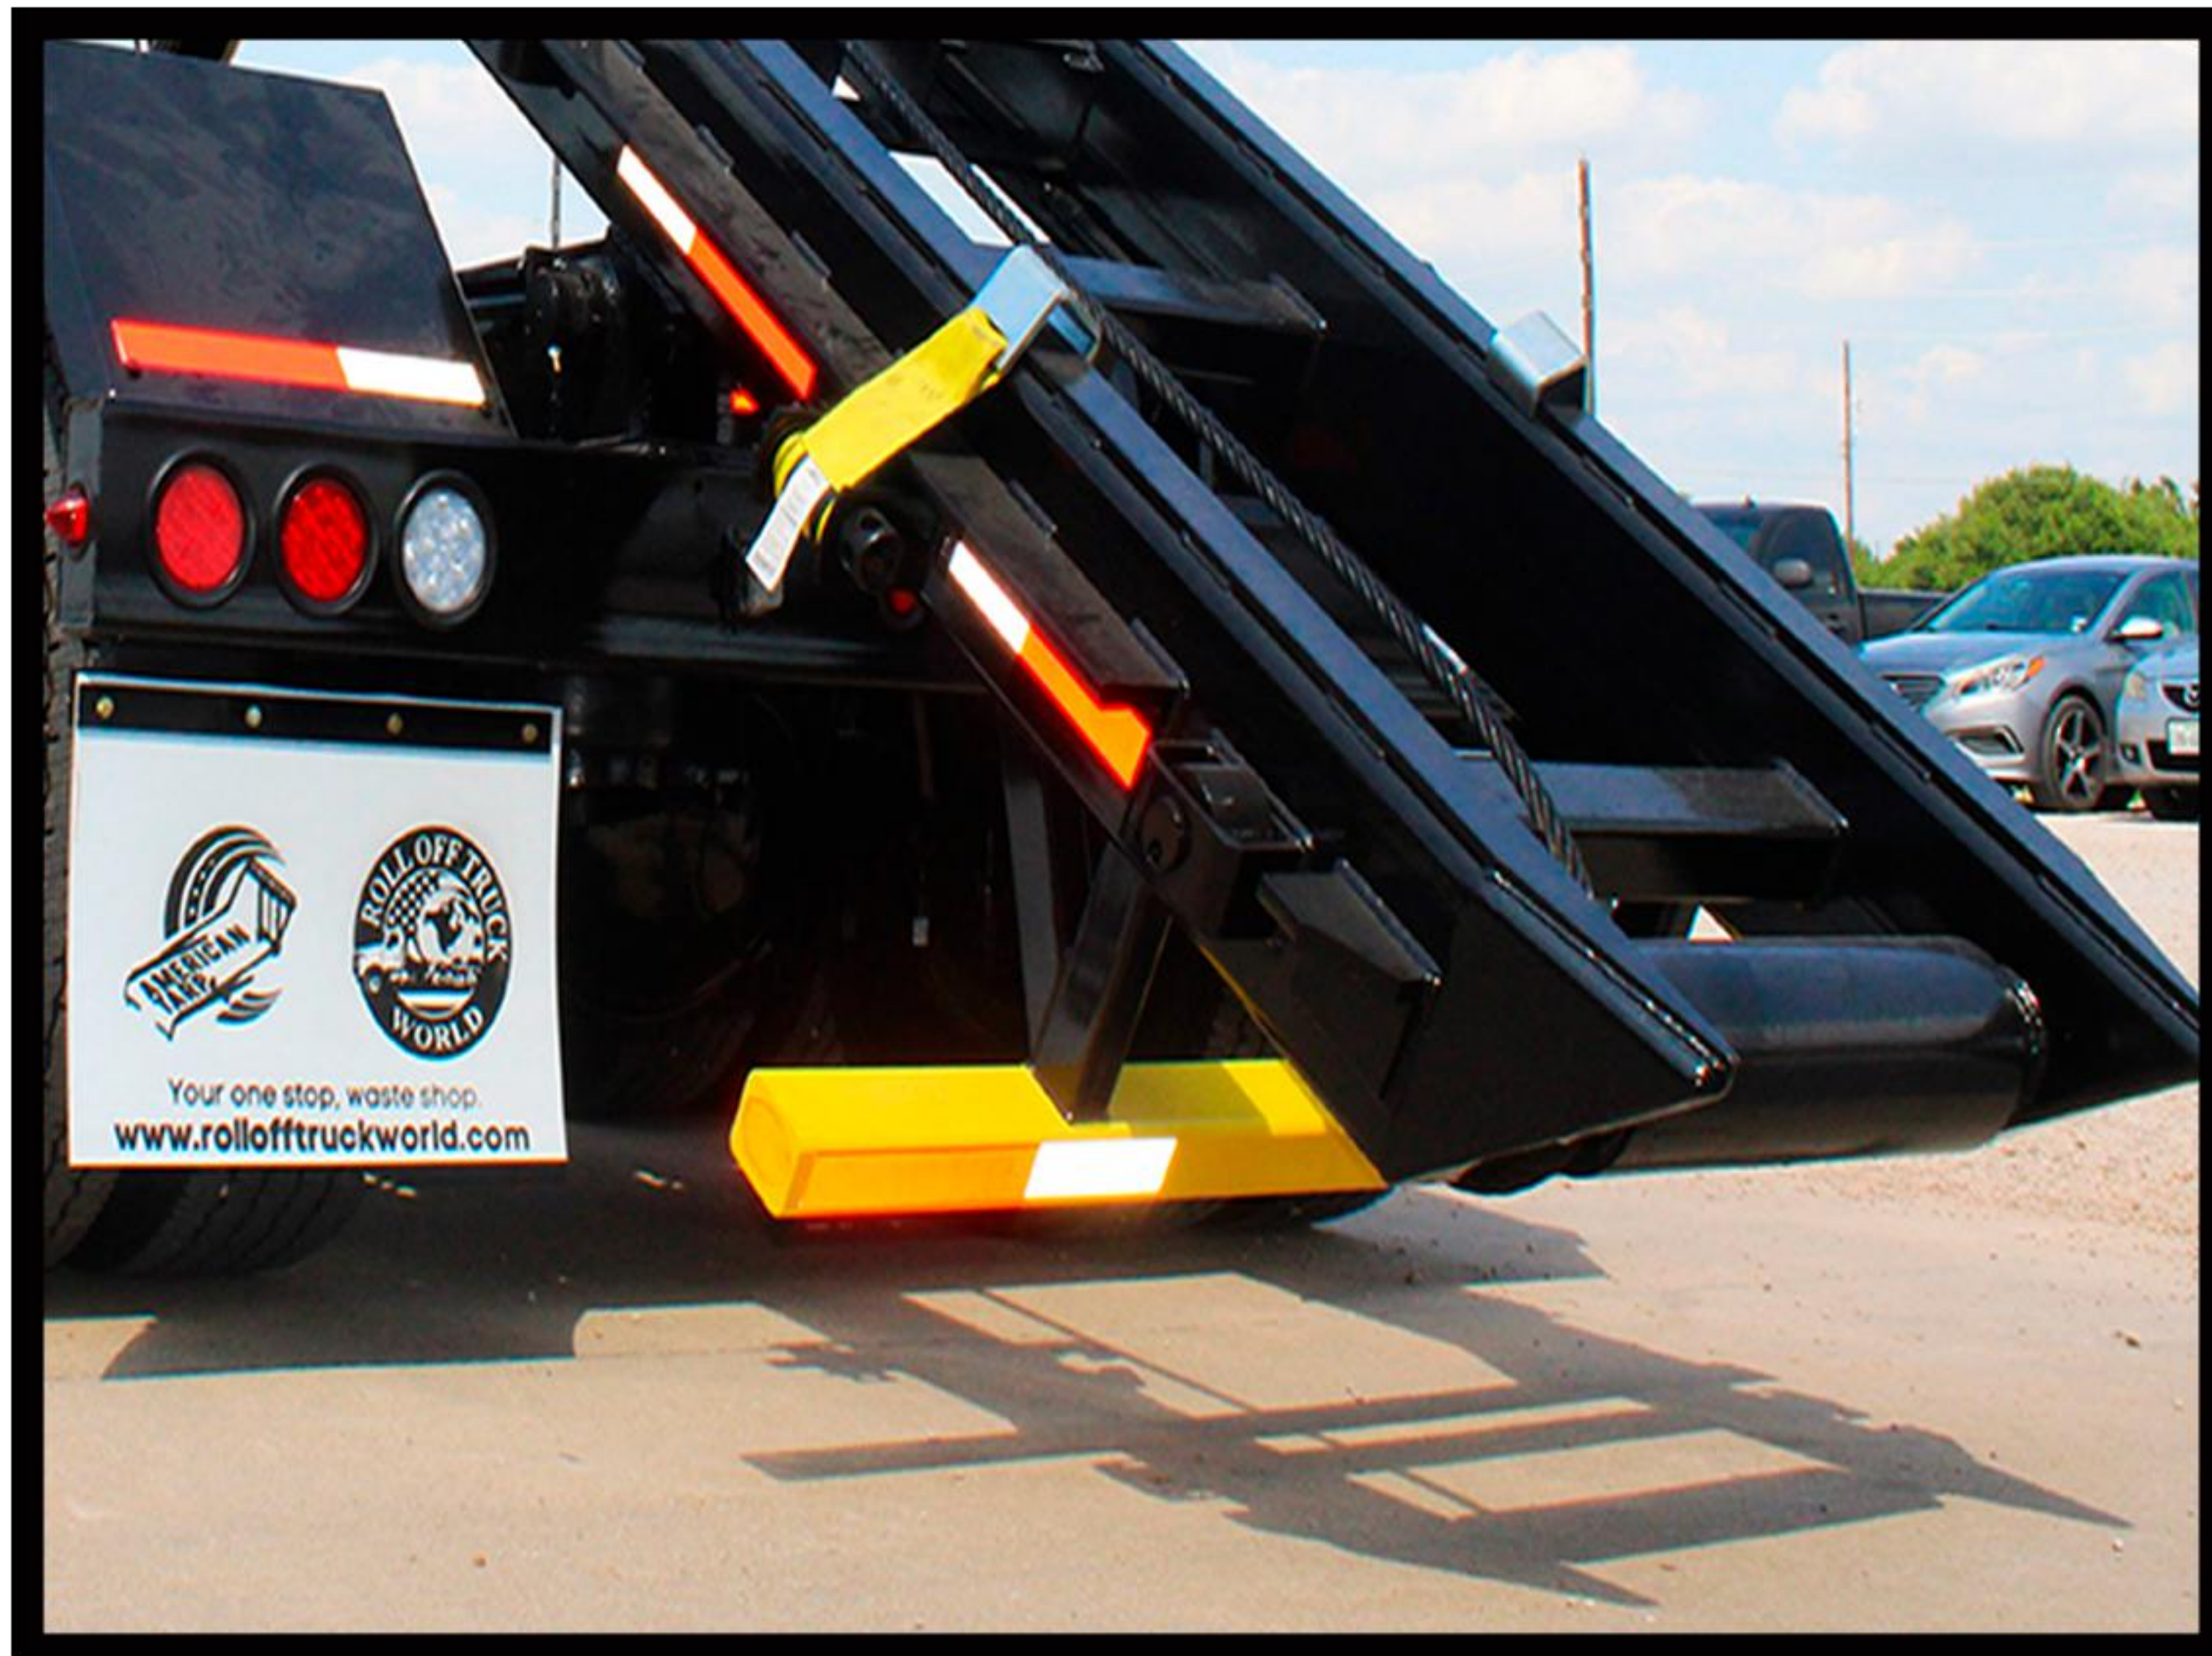

FIXED DOT BUMPER

SIMPLE IS OFTEN TIMES BETTER. HEAVY DUTY. ROBUST. FIXED. NO MOVING PARTS = EASIER MAINTENANCE



FULL TAIL ROLLER

STANDARD ON ALL OUTSIDE RAIL HOISTS MAKING IT EASIER TO LOAD AND UNLOAD CONTAINER. GREASABLE & EASILY REPLACEABLE.

STANDARD FEATURES

- 10" X 4 X 3/8" MAIN FRAME TUBE
- 4" X 4" X 3/8" SUBFRAME
- 2 1/2" DIAMETER REAR HINGE
- ALL WORKING POINTS GREASEABLE
- PINTLE HITCH READY APRON
- FIXED DOT BUMPER
- 3" DIAMETER LIFT CYLINDER SHAFTS
- 3/8 INCH X 5-INCH WINCH CYLINDER ROD COVERS
- 6 INBOARD AND OUTBOARD SUPPORTED OUTSIDE ROLLERS
- HEAVY DUTY CONTAINER LONG SILL SUPPORTS ON REAR OF HOIST MAINFRAME 48" x 3/4" x 4" x 4"
- 48 GALLON HYDRAULIC OIL RESERVOIR WITH SIGHT GLASS AND TEMPERATURE GAUGE

- INSIDE ALUMINUM ENCLOSED CAB CONTROLS WITH HOIST UP ALARM, PTO SWITCH, LED LIGHT SWITCH & HOIST UP LIGHT

- 2 OR 5 SPOOL OUTSIDE VALVE CONTROLS
- (2) LED WORK LIGHTS
- 7/8" CABLE WITH HEAVY DUTY HOOK
- 48° DEGREE DUMP ANGLE ON ALL MODELS

DRIVER SAFETY

- HOIST UP ALARM
- HOIST UP BODY LIGHT WITH BODY SWITCH SENSOR
- BACKUP ALARM
- LED WORK LIGHTS
- AUTOMARIC AIR BAGS DROP FOR (AIR RIDE CHASSIS)

OPTIONAL FEATURES

- BEHIND CAB MOUNTED HYDRAULIC RESERVOIR TANK
- TOOL BOXES (STEEL-POLISHED-ALUMINUM)
- AUXILIARY STOPS FOR DIFFERENT CONTAINER LENGTHS
- POLY / STEEL / ALUMINUM FENDERS
- TARPING SYSTEMS
- RATCHET TIE DOWN STRAPS
- PINTLE HOOK KIT WITH ELECTRICAL, AIR CONNECTIONS & D RINGS
- HYDRAULIC LINE PLUMBING FOR LIVE PUP OR PINTLE HITCH TRAILER

- FRONT MOUNT PUMP
- PTO
- ON BOARD SCALE SYSTEMS
- EXTRA WORK LIGHTS & SAFETY LIGHTS
- REAR VIEW & SIDE CAMERA SYSTEMS
- INTEGRATED HYDRAULICS CAN BE USED, IF HYDRAULIC TARPING IS USED



AUXILLARY FOLD STOPS



PINTLE HITCH KIT



TOOL BOXES



POLY , STEEL & ALUMINUM FENDERS

XOR SERIES MODELS

MODEL	CAPACITY	CA CT	CT WITH TARP	LENGTH	DUMP AGLE	LIFT CYLINDER	WINCH CYLINDER	CONTAINER LENGTH FT	APX WEIGHT LBS
XOR-30-22	30,000	176"	188"	23'3"	48°	6.7" X 4" X 79" DA	6.7" X 4" X 79" DA	16'-22'	7550
XOR-60-22	60,000	176"	188"	23'3"	48°	6.7" X 4" X 79" DA	6.7" X 4" X 79" DA	16'-22'	7550
XOR-75-22	75,000	176"	188"	23'3"	48°	7" X 4" X 79" DA	6.7" X 4" X 79" DA	16'-22'	7550

*

CAUTION: THIS EQUIPMENT SHOULD BE OPERATED BY PROPERLY TRAINED PERSONNEL. IMPROPER USE, MISUSE, OR LACK OF MAINTENANCE COULD CAUSE INJURY TO PERSONS OR PROPERTY. PHOTOS USED IN THIS BROCHURE ARE ILLUSTRATIVE ONLY. WE RESERVE THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE. INFORMATION CONTAINED WITHIN THIS LITERATURE IS BELIEVED TO BE THE MOST ACCURATE AVAILABLE AT THE TIME OF PRINTING.

